

PyBox compact



Figure shows configuration variant

HIGHLIGHTS

- High performance and high density
- Wall mounting
- Front I/O, 4x slots full height
- Easily replaceable dust filter
- Available as AC and DC version

OEM Platform Specifications

CHASSIS	Material	Stainless steel, powder coated
	Dimensions (WxDxH)	320x308x 134 mm
	Mounting	Desktop, optional wall mount
	Weight	From 5,5 kg
	Board	Mini-ITX, µATX
	Expansion slots	4x full height
	System cooling	1x 120 mm fan
	Datenspeicher	Up to 1x 2,5" / 3,5" HDD / SSD installed internally Optional hot-swappable 2x 2,5"
POWER SUPPLY	Voltage	9-24 V DC, 100-240 V AC
CPU	Class	From Intel® Atom™ up to Intel® Core™ i7
	TDP	10W (passive cooling) up to 65W (active cooling)
OPTIONS	Front bezel	LCD, LED, hot-swappable trays, ODD
	Accessories	Wall mount kit, dust filter
	Customizing	Color of choice and powder coating for chassis Front bezel printing Custom external packaging
	Product certification	CE, CB, UL, FCC, CCC, EAC
PACKING	Dimensions	416x416x268 mm
	Units per pallet	14

ds_PyBox_compact_EN_rel_1.0 - specification is subject to change

PyBox compact

Dimensions (in mm)

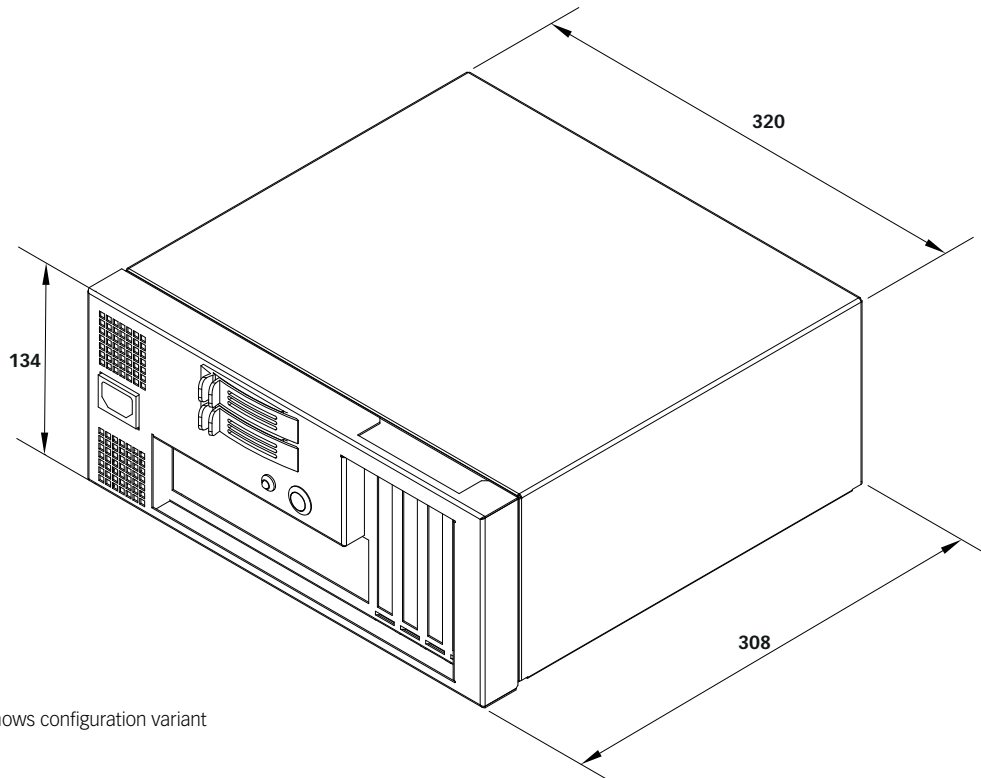


Figure shows configuration variant