

# PyRa 1U ultrashort

## HIGHLIGHTS

- Only 220 mm depth
- Rack mount without rails
- Available as AC and DC version



Figure shows configuration variant

## OEM Platform Specifications

<b>CHASSIS</b>	Material	Steel, powder coated
	Mounting depth	220 mm
	Mounting	1U Rackmount, no rails necessary
	Weight	From 3 kg
	Board	Mini-ITX
	Expansion slots	1 x full height
	System cooling	Up to 4x 40 mm fans
	Storage	Up to 2x 2,5" HDD / SSD installed internally Optional hot-swappable 2x 2,5"
<b>POWER SUPPLY</b>	Voltage	9-24 V DC, 100-240 V AC
<b>CPU</b>	Class	From Intel® Atom™ up to Intel® Core™ i7 / Xeon™
	TDP	10W (passive cooling) up to 35W (active cooling)
<b>OPTIONS</b>	Front bezel	I/O, LCD, LED, hot-swappable trays, ODD
	Accessories	Dust filter, SD-Card reader
	Customizing	Color of choice and powder coating for chassis Front bezel printing Custom external packaging
	Product certification	CE, CB, UL, FCC, CCC, EAC
	<b>PACKING</b>	Dimensions
	Units per pallet	32

ds\_PyRa\_1U\_ultrashort\_EN\_rel\_1.0 - specification is subject to change

## PyRa 1U ultrashort

### Dimensions (in mm)

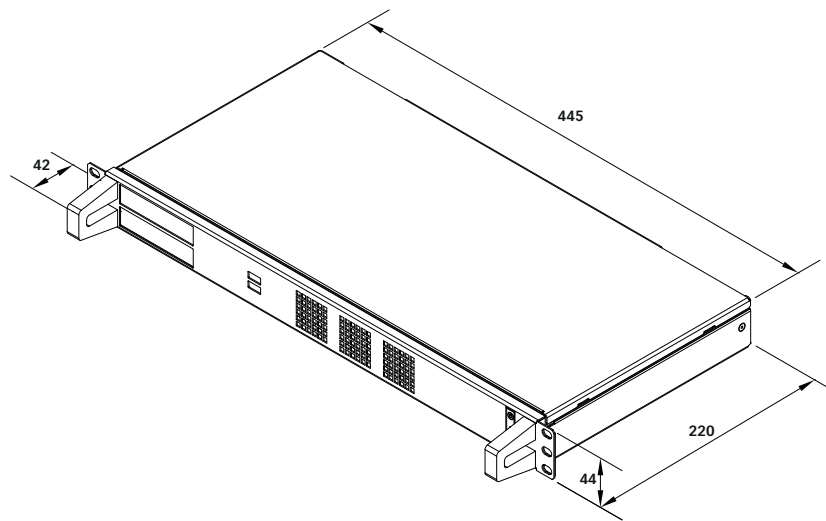


Figure shows configuration variant

ds\_PyRa\_1U\_ultrashort\_EN\_rel\_1.0 - specification is subject to change