

PyRa 3U short



HIGHLIGHTS

- Plenty of space for high performance - 450 mm depth
- Upgradable to dual socket CPU
- 7x slots full height
- Optional redundant AC and DC power supply

Figure shows configuration variant

OEM Platform Specifications

CHASSIS	Material	Steel, powder coated
	Mounting depth	449 mm
	Mounting	3U Rackmount, fully extendable telescopic rails
	Weight	From 14 kg
	Board	µATX, ATX
	Expansion slots	Up to 7x full height
	System cooling	2x 80 mm fans
POWER SUPPLY	Storage	Up to 24 / 8x 2,5" / 3,5" HDD / SSD installed internally Optional hot-swappable 12x 2,5"
	Voltage	40-72 V DC, 100-240 V AC
CPU	Class	From Intel® Atom™ up to Intel® Core™ i7 / Xeon™
	TDP	Up to 2x 145W (active cooling)
OPTIONS	Front bezel	I/O, LCD, LED, hot-swappable trays, ODD
	Accessories	Redundant power supply, telescopic rails
	Customizing	Color of choice and powder coating for chassis Front bezel printing Custom external packaging
	Product certification	CE, CB, UL, FCC, CCC, EAC
PACKING	Dimensions	782x598x277 mm
	Units per pallet	14

ds_PyRa_3U_short_EN_rel_1.0 · specification is subject to change

PyRa 3U short

Dimensions (in mm)

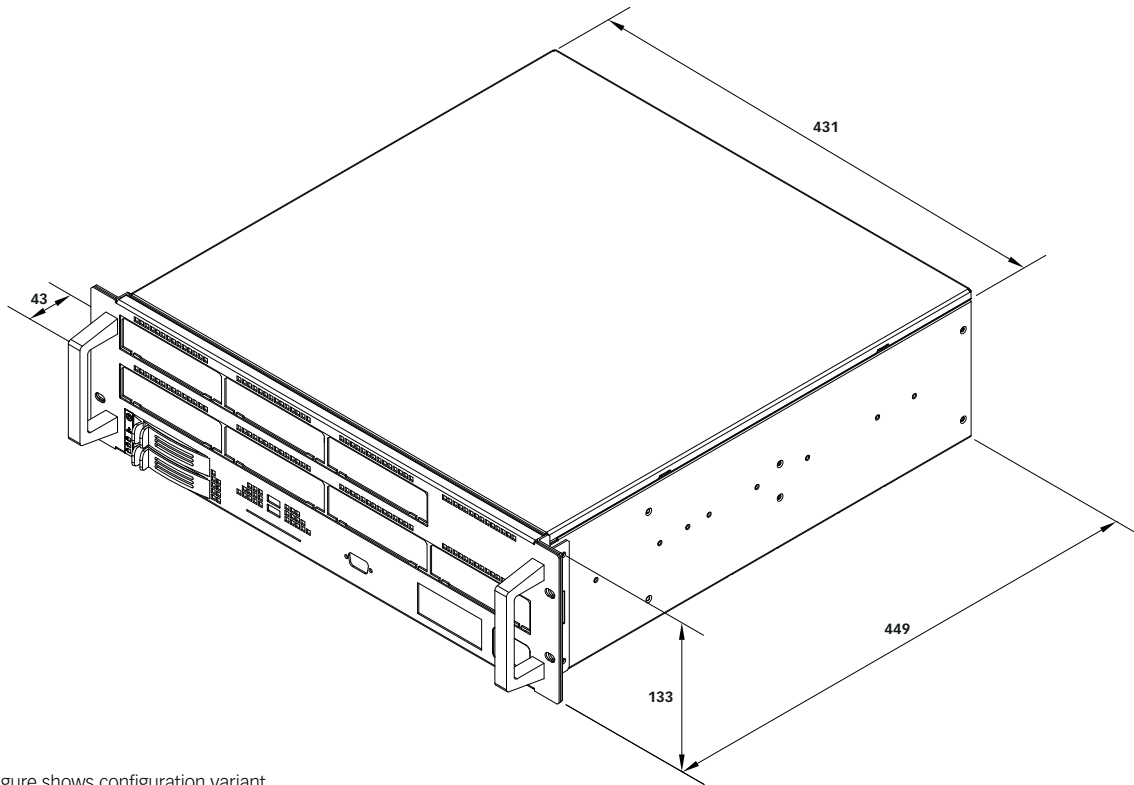


Figure shows configuration variant