

## PyRa 4U short



Figure shows configuration variant

### HIGHLIGHTS

- Plenty of space for high performance - 460 mm depth
- Upgradable to Dual Socket CPU
- Up to 7x slots full height
- Optional redundant AC and DC power supply
- Optional hot swap fans

## OEM Platform Specifications

<b>CHASSIS</b>	Material	Steel, powder coated
	Mounting depth	456 mm
	Mounting	4U Rackmount, fully extendable telescopic rails
	Weight	From 16 kg
	Board	µATX, ATX
	Expansion slots	Up to 7x full height
	System cooling	2x 120 mm fans
	Storage	Up to 8 / 4x 2,5" / 3,5" HDD / SSD installed internally Optional hot-swappable 10x 2,5" front and 2x 2,5" rear
<b>POWER SUPPLY</b>	Voltage	40-72 V DC, 100-240 V AC
<b>CPU</b>	Class	From Intel® Atom™ up to Intel® Core™ i7 / Xeon™
	TDP	Up to 2x 145W (active cooling)
<b>OPTIONS</b>	Front bezel	I/O, LCD, LED, hot-swappable trays, ODD
	Accessories	Redundant power supply, telescopic rails, dust filter
	Customizing	Color of choice and powder coating for chassis Front bezel printing Custom external packaging
	Product certification	CE, CB, UL, FCC, CCC, EAC
<b>PACKING</b>	Dimensions	782x598x277 mm
	Units per pallet	14

ds\_PyRa\_4U\_short\_EN\_rel\_1.0 · specification is subject to change

## PyRa 4U short

### Dimensions (in mm)

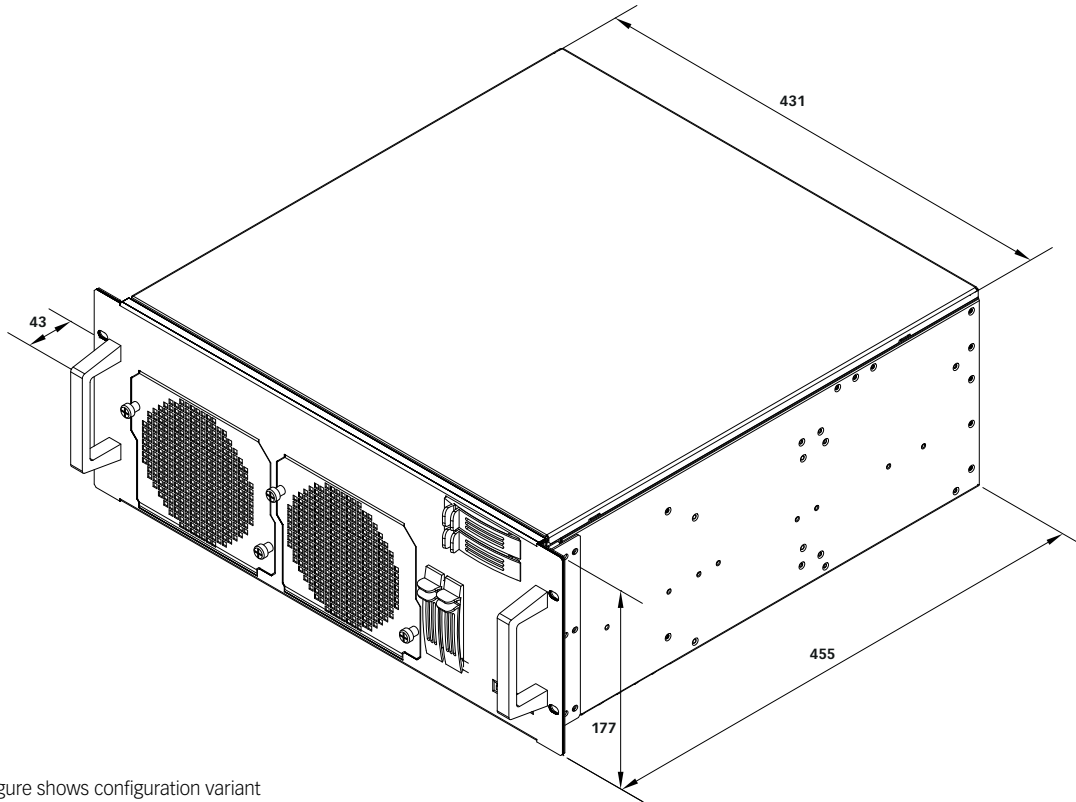


Figure shows configuration variant