

## PyRa SBC 2U flexi



### HIGHLIGHTS

- 19" capable PC system - 440 mm depth
- With SBC card PICMG 1.3
- 5x expansion slots
- Hot swap fans with dust filter option

Figure shows configuration variant

## OEM Platform Specifications

|                     |                       |   |
|---------------------|-----------------------|---|
| <b>CHASSIS</b>      | Material              | Steel, powder coated  |
|                     | Mounting depth        | 440 mm  |
|                     | Mounting              | 2U Rackmount, fully extendable telescopic rails   |
|                     | Weight                | From 10 kg  |
|                     | Board                 | PICMG 1.3 full size   |
|                     | Expansion slots       | Up to 5x full height  |
|                     | System cooling        | 2x 80 mm hot swap fans  |
|                     | Storage               | Up to 4 / 1x 2,5" / 3,5" HDD / SSD installed internally<br>Optional hot-swappable 2x 2,5"           |
| <b>POWER SUPPLY</b> | Voltage               | 100-240 V AC  |
| <b>CPU</b>          | Class                 | From Intel® Atom™ up to Intel® Core™ i7 / Xeon™   |
|                     | TDP                   | Up to 95W (active cooling)  |
| <b>OPTIONS</b>      | Front bezel           | I/O, LED, hot-swappable trays, ODD  |
|                     | Accessories           | Telescopic rails, dust filter   |
|                     | Customizing           | Color of choice and powder coating for chassis<br>Front bezel printing<br>Custom external packaging |
|                     | Product certification | CE, CB, UL, FCC, CCC, EAC   |
|                     | <b>PACKING</b>        | Dimensions  |
|                     | Units per pallet      | 14  |

ds\_PyRa\_SBC\_2U\_flexi\_EN\_rel\_1.0 - specification is subject to change

## PyRa 2U flexi

### Dimensions (in mm)

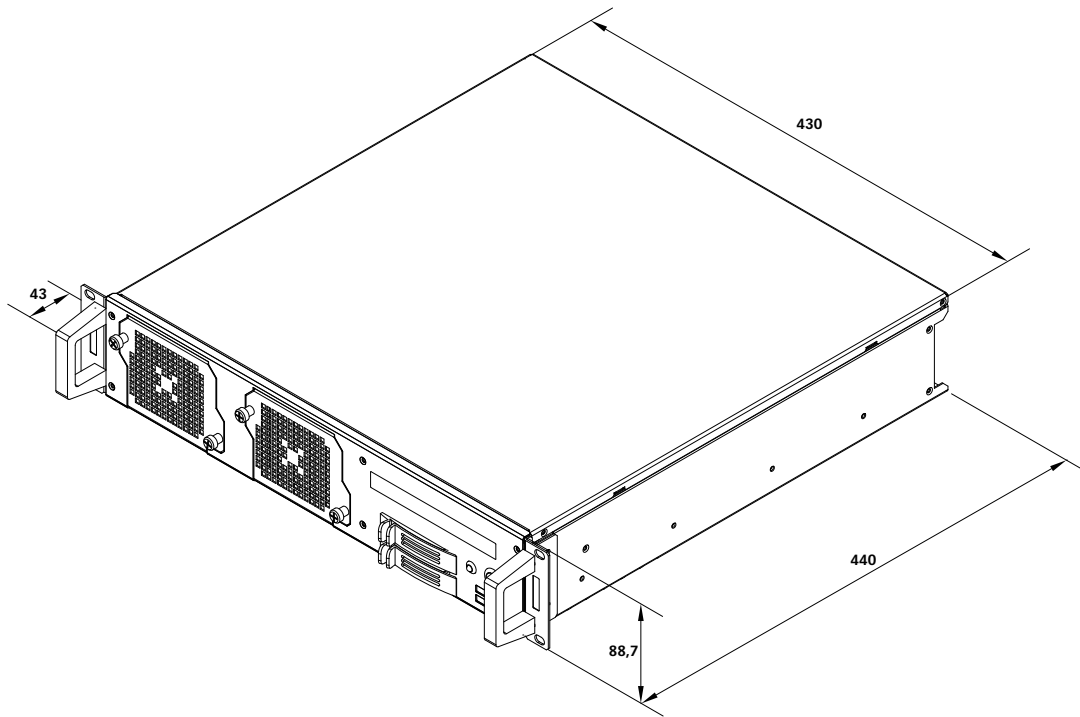


Figure shows configuration variant