

NetFlex 1U ultrashort



Figure shows configuration variant

HIGHLIGHTS

- Only 220 mm depth
- Rack mount without rails
- Ideal for use in network cabinets
- Best price performance ratio for server appliances

OEM Platform Specifications

CHASSIS	Material	Steel, powder coated
	Mounting depth	220 mm
	Mounting	1U Rackmount, no rails necessary
	Weight	From 3 kg
	Board	Mini-ITX
	Expansion slots	1x full height
	System cooling	Up to 4x 40 mm fans
	Storage	Up to 2x 2,5" HDD / SSD installed internally Optional hot-swappable 2x 2,5"
POWER SUPPLY	Voltage	9-24 V DC, 100-240 V AC
CPU	Class	From Intel® Atom™ up to Intel® Core™ i7 / Xeon™
	TDP	10W (passive cooling) up to 35W (active cooling)
OPTIONS	Front bezel	I/O, LCD, LED, hot-swappable trays, ODD, ELX modules
	Accessories	Dust filter, SD-Card reader
	Customizing	Color of choice and powder coating for chassis Front bezel printing Custom external packaging
	Product certification	CE, CB, UL, FCC, CCC, EAC
PACKING	Dimensions	597x366x215 mm
	Units per pallet	32

ds_NetFlex_1U_ultrashort_EN_re_1.0 - specification is subject to change

NetFlex 1U ultrashort

Dimensions (in mm)

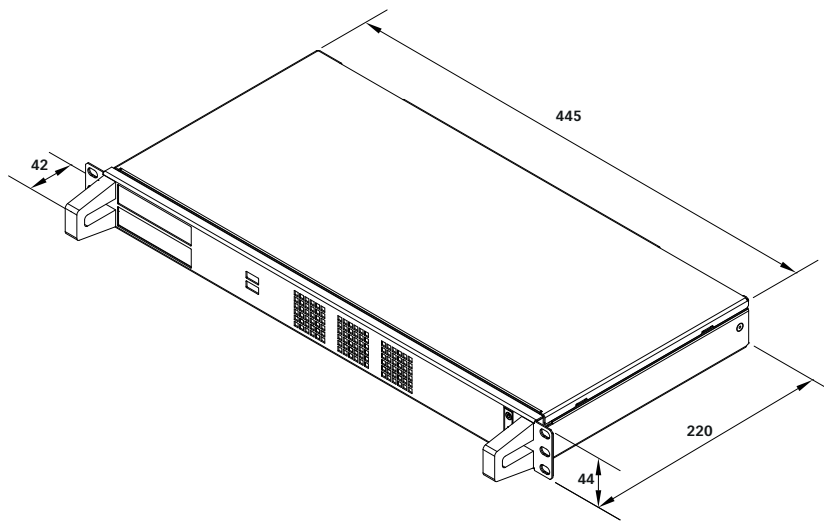


Figure shows configuration variant

ds_NetFlex_1U_ultrashort_EN_re_1.0 - specification is subject to change