

NetFlex 1U value

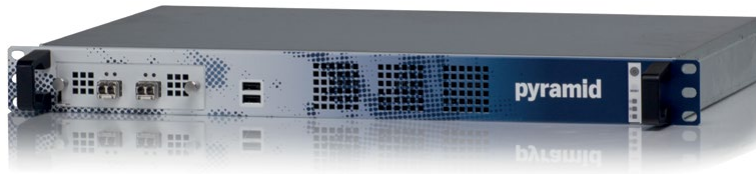


Figure shows configuration variant

HIGHLIGHTS

- Only 300 mm depth
- Rack mount without rails
- Best price ratio for basic server appliances

OEM Platform Specifications

CHASSIS	Material	Steel, powder coated
	Mounting depth	300 mm
	Mounting	1U Rackmount, no rails necessary
	Weight	From 3,5 kg
	Board	Mini-ITX, µATX
	Expansion slots	1x full height
	System cooling	Up to 4x 40 mm fans
	Storage	Up to 2 / 1x 2,5" / 3,5" HDD / SSD installed internally Optional hot-swappable 2x 2,5"
POWER SUPPLY	Voltage	9-24 V DC, 100-240 V AC
CPU	Class	From Intel® Atom™ up to Intel® Core™ i7 / Xeon™
	TDP	10W (passive cooling) up to 65W (active cooling)
OPTIONS	Front bezel	I/O, LCD, LED, hot-swappable trays, ODD, ELX module
	Accessories	Dust filter
	Customizing	Color of choice and powder coating for chassis Front bezel printing Custom external packaging
	Product certification	CE, CB, UL, FCC, CCC, EAC
PACKING	Dimensions	782x598x277 mm
	Units per pallet	14

ds_NetFlex_1U_value_EN_rel_1.0 - specification is subject to change

NetFlex 1U value

Dimensions (in mm)

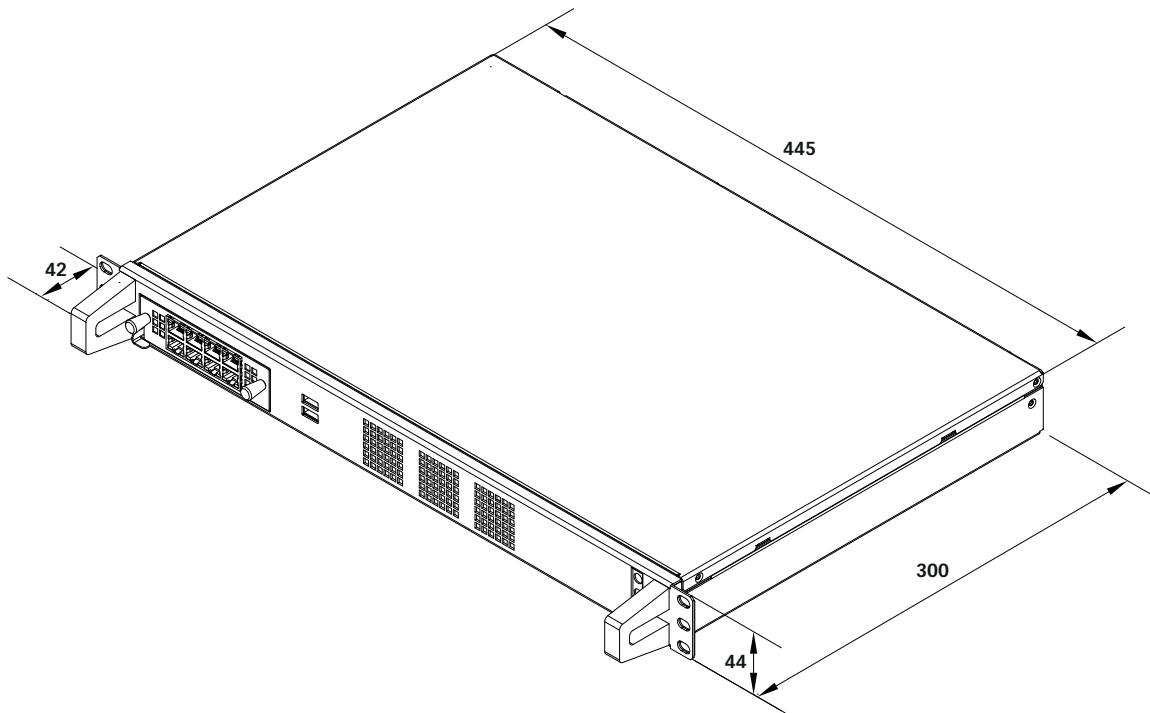


Figure shows configuration variant

ds_NetFlex_1U_value_EN_rel_1.0 - specification is subject to change