

NetFlex 3U



HIGHLIGHTS

- Up to 7x full height expansion cards
- Customizable front layouts
- Optimal for dual CPU systems

Figure shows configuration variant

OEM Platform Specifications

CHASSIS	Material	Steel, powder coated
	Mounting depth	449 mm
	Mounting	3U Rackmount, fully extendable telescopic rails
	Weight	From 14 kg
	Board	µATX, ATX
	Expansion slots	Up to 7x full height or 7x ELX modules
	System cooling	2x 80 mm fans
	Storage	Up to 24 / 8 x 2,5" / 3,5" HDD / SSD installed internally Optional hot-swappable 12x 2,5"
POWER SUPPLY	Voltage	40-72 V DC, 100-240 V AC
CPU	Class	From Intel® Atom™ up to Intel® Core™ i7 / Xeon™
	TDP	30W (passive cooling) up to 2x 145W (active cooling)
OPTIONS	Front bezel	I/O, LCD, LED, hot-swappable trays, ODD, ELX modules
	Accessories	Redundant power supply, telescopic rails
	Customizing	Color of choice and powder coating for chassis Front bezel printing Custom external packaging
	Product certification	CE, CB, UL, FCC, CCC, EAC
PACKING	Dimensions	782x598x277 mm
	Units per pallet	14

ds_NetFlex_3U_EN_re_1.0 - specification is subject to change

NetFlex 3U

Dimensions (in mm)

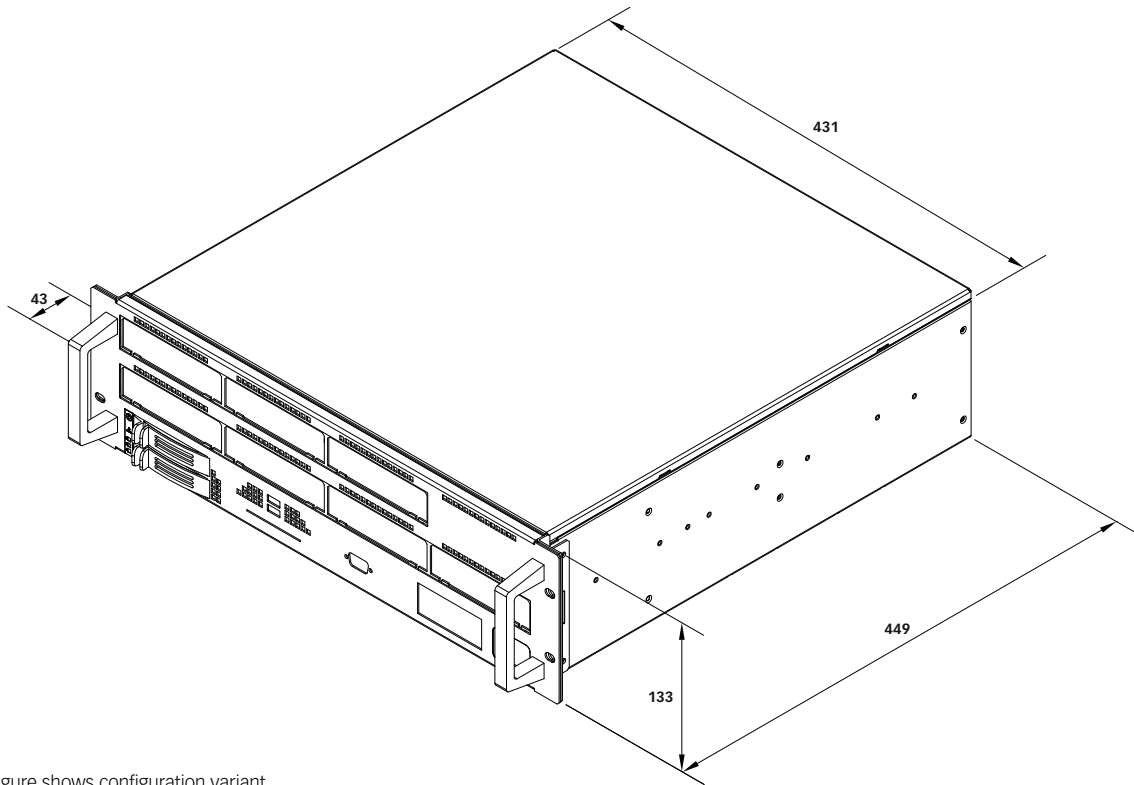


Figure shows configuration variant