

polytouch[®] 32



HIGHLIGHTS

- Projected capacitive 32" multi-touch system
- Intel[®] Core™ i5-4570TE CPU
- Up to 10 touches
- Full HD (1920x1080)
- QMS for individual system configuration
- LED user guidance

Picture shows pedestal "Elegance", intelligent LED user guidance and QMS extension modules: Barcode scanner, POS thermal printer and magnetic card reader.

polytouch[®] 32


DISPLAY	Screen size	812,8 mm (31,5") (Anti Glare)
	Resolution	1920x1080 (Full HD)
	Brightness	450 cd/m ²
	Contrast	3000:1
TOUCH CONTROLLER	Touch technology	Projected capacitive technology (PCT)
	Simultaneous touches	10 touches
	Latency	<25 ms
COMPUTER UNIT	Processor	Intel [®] Core™ i5-4570TE Haswell (2.7GHz [Turbo: 3.3GHz] / 4MB cache / 2 cores / 4 threads)
	Chipset	Intel [®] Q87 Express
	Graphics	Intel [®] HD4600 graphics on Chip (350MHz [Turbo: 1GHz])
	Memory	8GB DDR-3 PC1600
	Storage	mSATA SSD 128GB
	LAN/WLAN	1GbE LAN/300Mbps WLAN
	OS compatibility	Windows 7 (32/64 Bit), Windows 8 (32/64 Bit), Ubuntu Linux
CHASSIS	Dimension (WxDxH)	Slim modules: 951x446x83 mm QMS modules: 1042x446x82 mm (with QMS POS thermal print: 1042x446x88 mm)
	System weight	27 kg (without packaging and pedestal)
	Power Input	100-240VAC C14
	Mounting	VESA MIS-E; wall-mount, built-in, pedestal

ds_ptL32_V2_EN_rel_1.0 - specifications are subject to change

polytouch[®] 32

Options

polytouch[®] QMS - Quick Mounting System

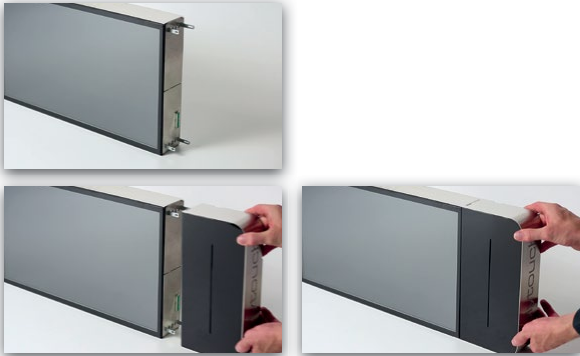

QMS extension modules polytouch[®] 32



80x80mm POS thermal printer



Verifone VX820
Chip and PIN payment



Intelligent LED
user guidance



Magnetic card reader



Barcode scanner

ds_ptL_32_V2_EN_rel_1.0 - specifications are subject to change