

## polytouch<sup>®</sup> interactive mirror



Figure shows configuration variant

### HIGHLIGHTS

- 32" PCAP embedded
- All-in-one design



## polytouch<sup>®</sup> interactive mirror

Sample configuration\*

<b>CHASSIS</b>	Material	Stainless steel
	Dimensions (WxDxH)	1100 x 2190 x 65 mm
	Mounting	Floor-Standing (fixation to wall with three brackets)
	Weight	Approx. 50 kg
<b>DISPLAY</b>	Screen Size	800 mm (32")
	Resolution	1920x1080 (Full HD)
	Brightness	1000 cd/m <sup>2</sup>
	Contrast	3000:1
	View angle	178° h/v
	Reaction time	8 ms (grey-to-grey)
<b>OPERATION</b>	Technology	Projected capacitive touch
	Simultaneous touches	10 touches
	Surface	Mirrored
	Latency	< 10 ms
	Touch objects	Fingers
<b>COMPUTER UNIT</b>	Processor	6 <sup>th</sup> Generation Intel <sup>®</sup> Core™ i5 Processor (Intel <sup>®</sup> Core™ i7 optional)
	Chipset	Intel <sup>®</sup> Q170 Chipset
	Memory	Intel <sup>®</sup> HD530 Graphics
	Storage	8 GB DDR-4 (up to 16 GB)
	LAN	mSATA SSD 256 GB
	OS	Windows 7 (32/64 Bit), Windows 8 (32/64 Bit), Windows 10 (32/64 Bit), Ubuntu Linux
		<b>Display with PC-Box S</b>
<b>POWER</b>	Power supply	Internal
	Power consumption	max. 250 W (type 130 W)
	Power input	100 – 240 V AC, 50/60 Hz
<b>CERTIFICATIONS</b>	CE, other certifications on request	


\*polytouch<sup>®</sup> interactive mirror is only compatible with PC-Box S.

ds\_polytouch\_interactive\_mirror\_EN\_rel\_1.0 - specifications are subject to change

# polytouch® interactive mirror

## Dimensions (in mm)


Figure shows configuration variant

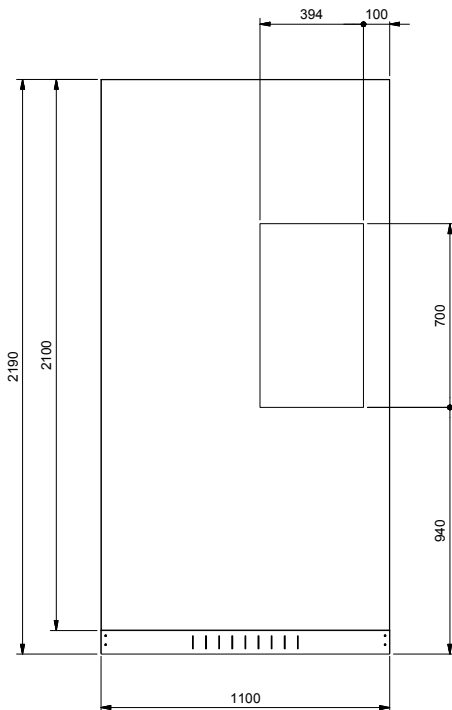

Front



Side

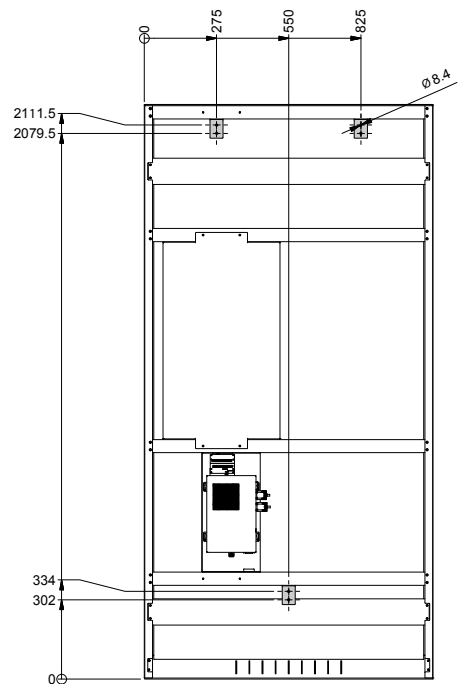

**Please note:**  
Mirror has to be fixed against tumbling with three brackets.

Rear

ds\_polytouch\_interactive\_mirror\_EN\_rel\_1.0 - specifications are subject to change