

All-in-one polytouch® component 55 4K

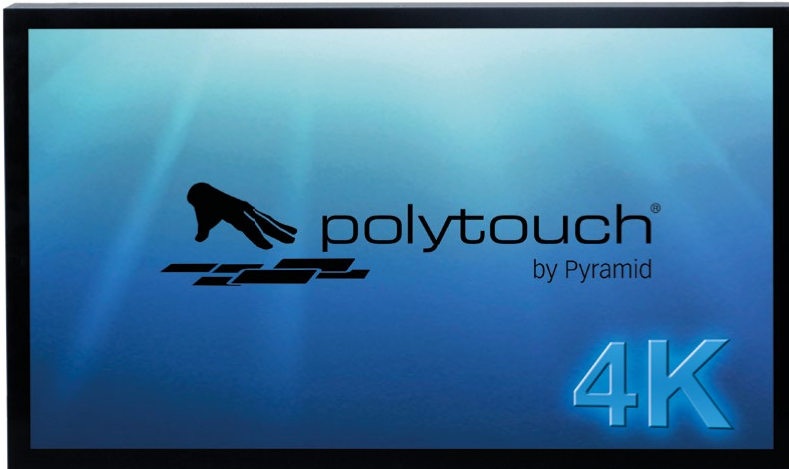


Figure shows configuration variant


HIGHLIGHTS

- InGlass™ Touch-Technology
- 10 touches
- Ultra HD Display (3840x2160)
- Intel® Core™ i5 Processor



All-in-one polytouch® component 55 4K

Sample configuration*

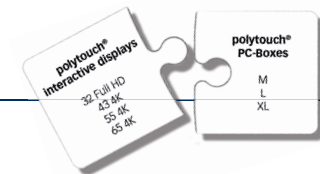


DISPLAY	Screen size	1388 mm (55")	
	Resolution	3840 x 2160 (Ultra HD) @ 60 Hz	
	Brightness	450 cd/m ²	
	Contrast	4000:1	
	Viewing angle	178° h/v	
	Reaction time	6.5 ms (grey-to-grey)	
OPERATION	Touch technology	InGlass™ Touch-Technology	
	Simultaneous touches	10 touches and drags	
	Surface	Glare	
	Latency	< 25 ms	
	Touch objects	Fingers, optionally styluses and gloves	
COMPUTER UNIT	Processor	6 th Generation Intel® Core™ i5 processor (Intel® Core™ i7 optional)	
	Chipset	Intel® Q170 Chipset	
	Graphics	Intel® HD530 graphics	
	Memory	16 GB DDR-4	
	Storage	mSATA SSD 256 GB	
	LAN	2x 1GbE LAN	
	OS compatibility	Windows 8 (32/64 Bit), Windows 10 (32/64 Bit), Ubuntu Linux	
POWER		Display only	Display with PC-Box M
	Power supply	External 24 V DC	Internal
	Power consumption	150 W	250 W
	Power input	100 – 240 V AC, 50/60 Hz	100 – 240 V AC, 50/60 Hz
CHASSIS		Display only	Display with PC-Box M
	Dimension (WxDxH)	1304 x 775 x 43 mm	1304 x 775 x 92 mm
	System weight net/gross	Approx. 44 kg/ 52 kg	Approx. 47 kg/ 55 kg
	Mounting	Wall-mount, built-in, standalone	Wall-mount, built-in, standalone
	VESA Standard	400 x 400	400 x 400
CERTIFICATIONS	CE, other certifications on request		

* All-in-one polytouch® component 55 4K is also compatible with PC-Box XL.

All-in-one polytouch® component 55 4K

Dimensions (in mm)

Figure shows configuration variant

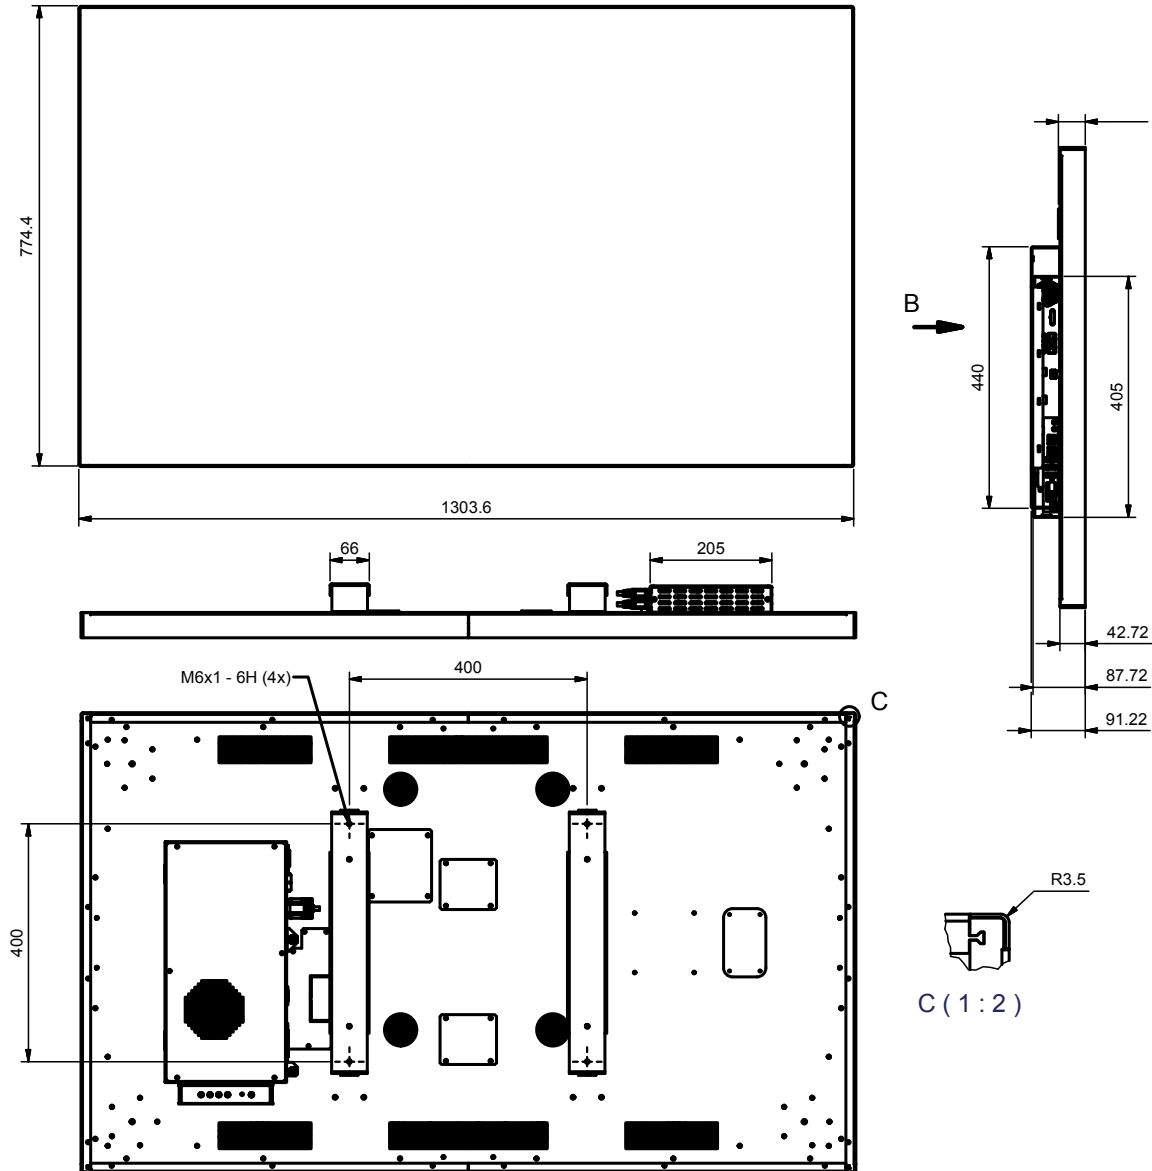

Mounting & customizing options

