

All-in-one polytouch® component 32 Full HD



Figure shows configuration variant

HIGHLIGHTS

- Projected capacitive touch (PCT)
- 10 touches
- Full HD Display (1920x1080)
- Intel® Core™ i5 processor



All-in-one polytouch® component 32 Full HD

Sample configuration*

DISPLAY	Screen size	820 mm (32")	
	Resolution	1920x1080 (Full HD)	
	Brightness	500 cd/m ²	
	Contrast	3000:1	
	Viewing angle	178° h/v	
	Reaction time	8 ms (grey-to-grey)	
OPERATION	Touch technology	Projected capacitive touch	
	Simultaneous touches	10 touches	
	Surface	Anti-Glare	
	Latency	< 10 ms	
	Touch objects	Fingers	
COMPUTER UNIT	Processor	6 th Gen. Intel® Core™ i5 processor (Intel® Core™ i7 optional)	
	Chipset	Intel® Q170 chipset	
	Graphics	Intel® HD530 graphics	
	Memory	8 GB DDR-4 (up to 16 GB)	
	Storage	mSATA SSD 256 GB	
	LAN	2x 1GbE LAN	
	OS compatibility	Windows 7 (32/64 Bit), Windows 8 (32/64 Bit), Windows 10 (32/64 Bit), Ubuntu Linux	
POWER		Display only	Display with PC-Box M
	Power supply	External 24 V DC	Internal
	Power consumption	max. 150 W (type 90 W)	max. 250 W (type 130 W)
	Power input	100–240 V AC, 50/60 Hz	100–240 V AC, 50/60 Hz
CHASSIS		Display only	Display with PC-Box M
	Dimension (WxHxD)	791 x 486 x 32 mm	791 x 486 x 78 mm
	System weight net/gross	Approx. 15.5 kg/ 18.5 kg	Approx. 18.5 kg/ 21.5 kg
	Mounting	Wall-mount, Standalone	Wall-mount, Standalone
	VESA Standard	300 x 300	300 x 300
CERTIFICATIONS	CE, other certifications on request		


ds_All-in-one_polytouch®_component_32_Full_HD_en_re_1.3 - specification is subject to change

* All-in-one polytouch® component 32 Full HD is only compatible with PC-Box M.


All-in-one polytouch® component 32 Full HD

Dimensions (in mm)

Figure shows configuration variant

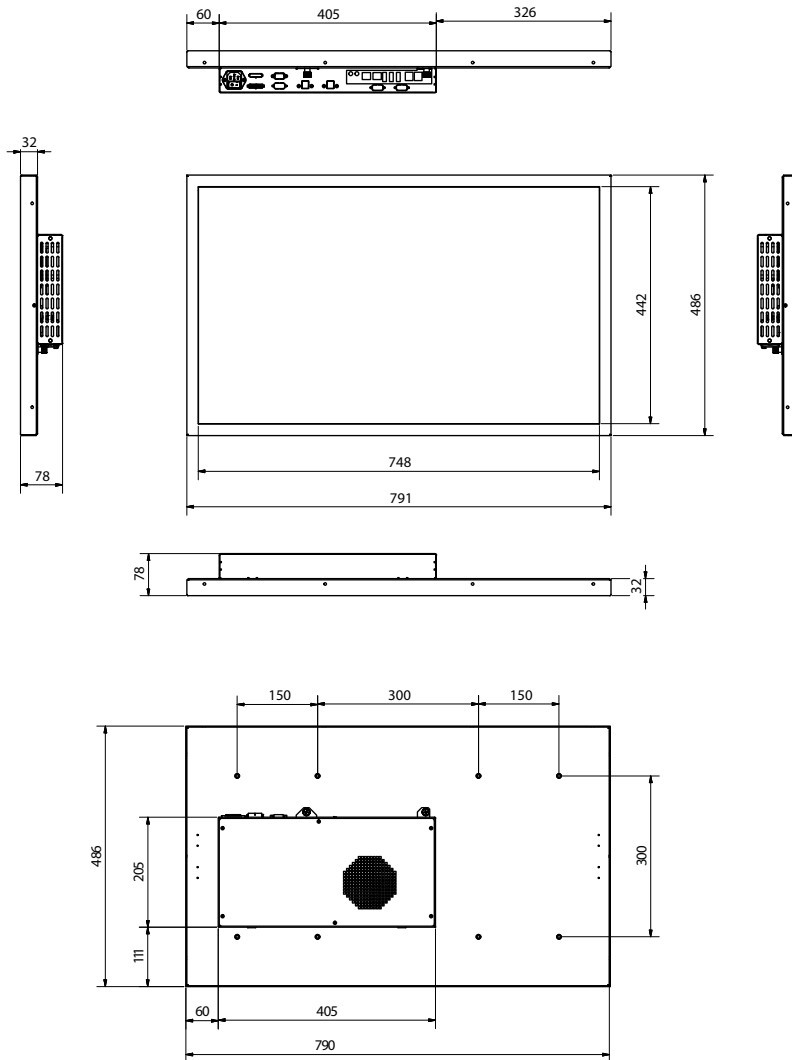

Mounting & customizing options

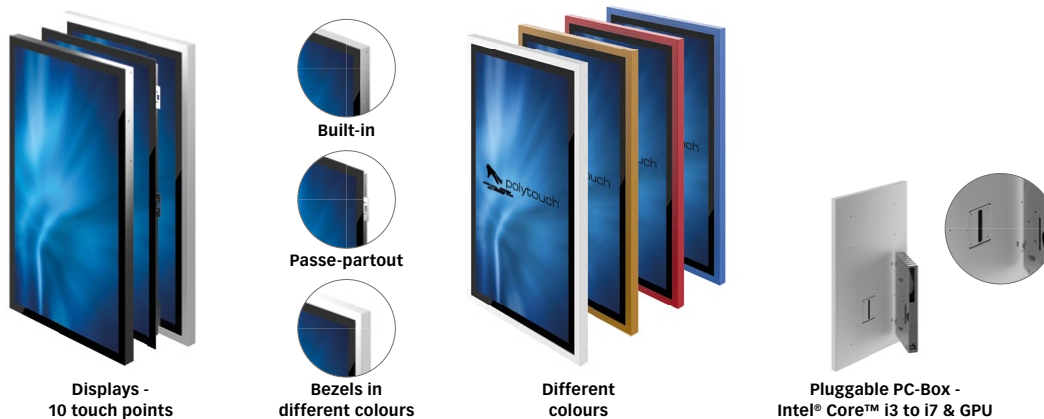

ds_All-in-one_polytouch®_component_32_Full_HD_en_re_1.3 - specification is subject to change