

PLS Hub

HIGHLIGHTS

- Compact and quiet server system
- DIN Rail, wall mount or rack option
- Lockable front bezel optional




Overview

CHASSIS	Material	Stainless steel, powder coated		
	Dimensions (WxDxH)	328x205x89 mm (without wallmount)		
	Mounting	Desktop, optional 19" 2U rack, wall mount or DIN rail		
	Weight	3.3 kg		
DETAILS	CPU, graphics	Intel® Atom Processor E3940 (4 x 1.80 GHz), Intel® HD Graphics		
	Chipset	System-on-Chip (SoC)		
	Memory	4 GB DDR4		
	Storage	1 x 128 GB M.2 SSD		
	LAN	2 x GbE (Intel® I210A)		
	Rear I/O	2 x USB (2 x 2.0, 2 x 3.0)		
		2 x RJ45		
		1 x VGA		
		1 x HDMI 1.4		
	Front I/O	1 x DisplayPort 1.2		
		Button / LED		
Dust protection	Filter on bottom side			
Cooling	Active			
Performance test	BurnIn	Idle	Standby	
	13 W	8.5 W	1 W	
POWER SUPPLY	Voltage/current	100-240 V AC, 1.5-3 A		
ENVIRONMENTAL CONDITIONS		Operating	Storage	
	Temperature	10-40°C	-10-70°C	
	Humidity	10-80%	10-95%	
	Protection class	IP20		
CERTIFICATIONS	Product certification	CE, UL, FCC		
PACKING	Dimensions	390x300x190 mm		

PLS Hub


Dimensions (in mm)

Figure shows configuration variant

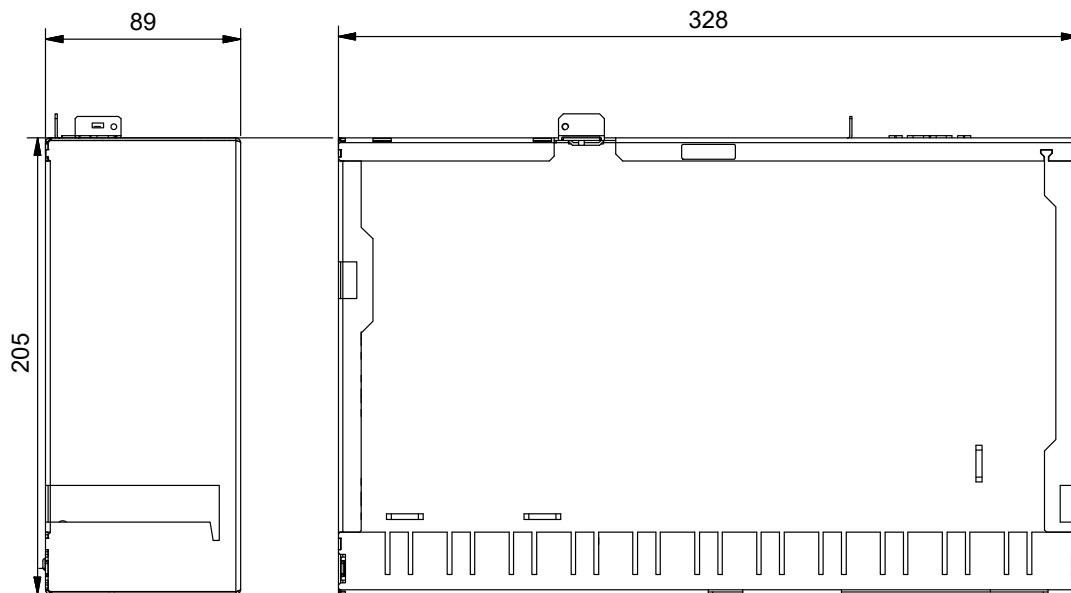


side


top

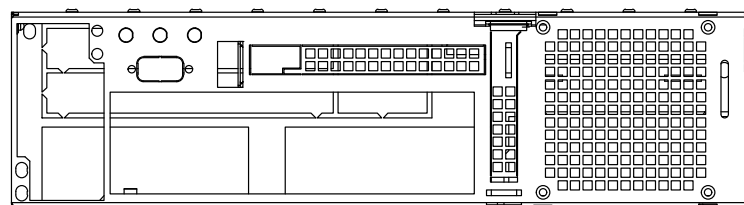

rear

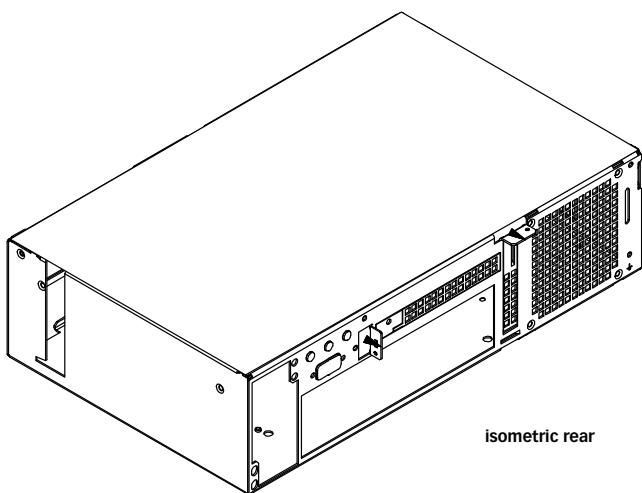

isometric rear

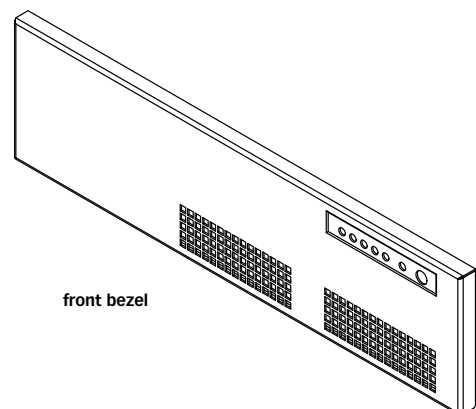

front bezel